



SAFEPRO

SFP3000

Upper: Waterproof Oxford+MICROFIBER BLACK CRAZY HORSE FINISHING

Lining: Waterproof Membrane Lining

Outsole: 257 Outsole, Rubber Cemented Side wall Stitching.

WIDE TOE Fiber Glass Composite toe


Kevlar Midsole

EH18KV

Insole: High elastic Sponge Memory

ASTM F2413-18 I C EH PR

CE EN 20345:2022 SR WR

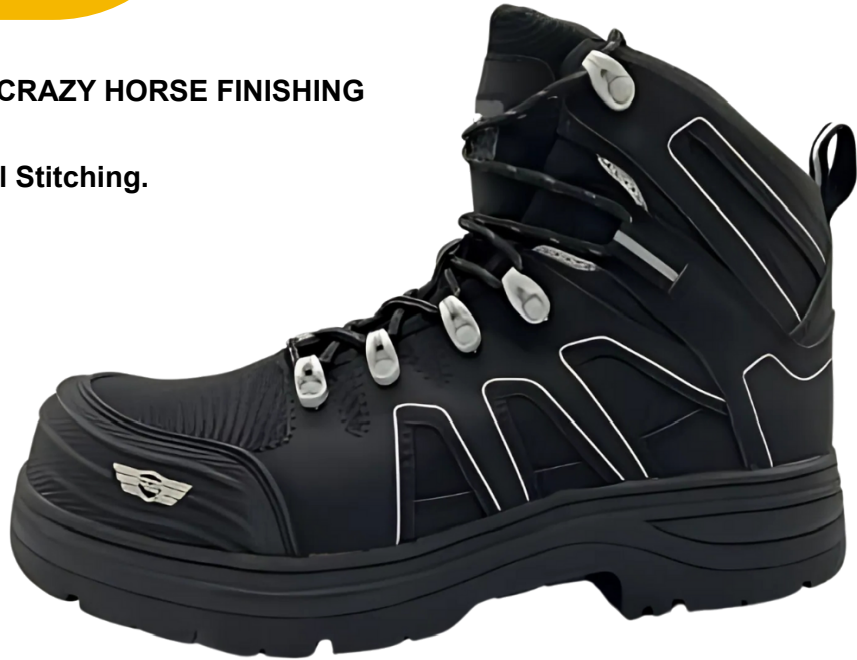

EURO SIZE	US SIZE	WIDTH
39	6 - 6.5	STANDARD
40	7 - 7.5	STANDARD
41	8 - 8.5	STANDARD
42	9 - 9.5	STANDARD
43	10 - 10.5	STANDARD
44	11 - 11.5	STANDARD
45	12 - 12.5	STANDARD
46	13 - 13.5	STANDARD
47	14 - 14.5	STANDARD
48	15 - 15.5	STANDARD
49	16 - 16.5	STANDARD
50	17 - 17.5	STANDARD

GENUINE

PERFORMANCE FOOTWEAR

Slip Resistant | Oil resistant | Dielectric Metal Free

Meets or Complies with ASTM F2413-18.

Impact Resistance (I): ASTM F2413-18.

Compression Resistance (C): ASTM F2413-18.

Electrical Hazard Protection (EH): ASTM F2413-18.

ASTM Puncture Resistance (PR)

Full Premium PR Midsole

High Test Composite Toe

Full Breathable Construction.

Full Grain Leather

Waterproof Membrane

EN ISO 20345:2022 SR SLIP RESISTANCE



SAFETY TOE CAP ANTI-SLIP SHOCK ABSORPTION OIL RESISTANT PETROL AND CHEMICAL RESISTANT PR MIDSOLE

Manufacturer: LV International, Miami FL, 33166